




L-2 NANO BENT

BNT

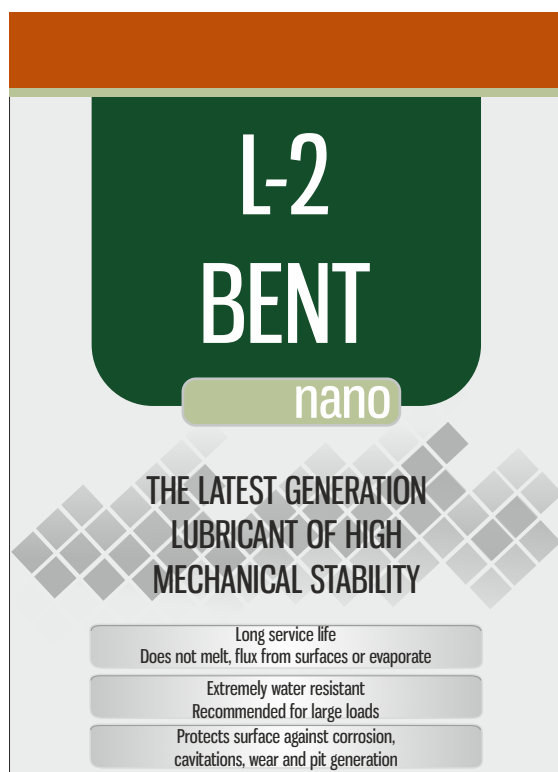

GENERAL INFORMATION

L-2 NANO BENT lubricant is intended for the lubrication of rolling and sliding bearings, and other frictional elements of industrial machines, working in conditions requiring lubricant with extreme mechanical stability. Provides superb resistance to water and weak acids. Featuring infusibility. The product is obtained through a concentration of highly refined mineral oil with water-proofed bentonite. With proper exchange or replenishment it retains its qualities in temperatures of even up to 220°C. It retains plasticity up to 5°C. The product is recommended for the lubrication of bearings through which a small torque is transmitted. Lubricant for heavy applications and loads, for applications in difficult conditions.

TECHNICAL DATA

Dropping point: 220°C
 Penetration after pressing, at 25°C: 295 mm/10
 Oil separation from lubricant, at 150°C: no more than 8%
 NLGI class: 2

USAGE

Product intended for the lubrication of rolling and sliding bearings, and other frictional elements of industrial machines, working with high loads — especially stroke loads. Provides superb water resistance. Product is not intended for the lubrication of bearings through which a small torque is transmitted or bearings with a small radial clearance.

CLASSIFICATION

| Article code | Name | Packaging | Type |
|--------------|---------------|------------------|------------|
| BNT08 | L-2 NANO BENT | container 0.8 kg | lubricants |
| BNT45 | L-2 NANO BENT | container 4.5 kg | lubricants |

CAUTION

All information, including illustrations, are reliable. However, the users should evaluate the usability of each product for a given application. TTP Polska Sp. z o.o. does not guarantee the accuracy of all information and does not accept responsibility for how the products are used. The liabilities of TTP Polska Sp. z o.o. are limited solely to the standard terms and conditions of sale of the product and in no case whatsoever does TTP Polska Sp. z o.o. bear any responsibility for accidental or indirect damages resulting in the sale, use and improper use of the product.

