




## PRO PTFE DRY-LUBE

PDL

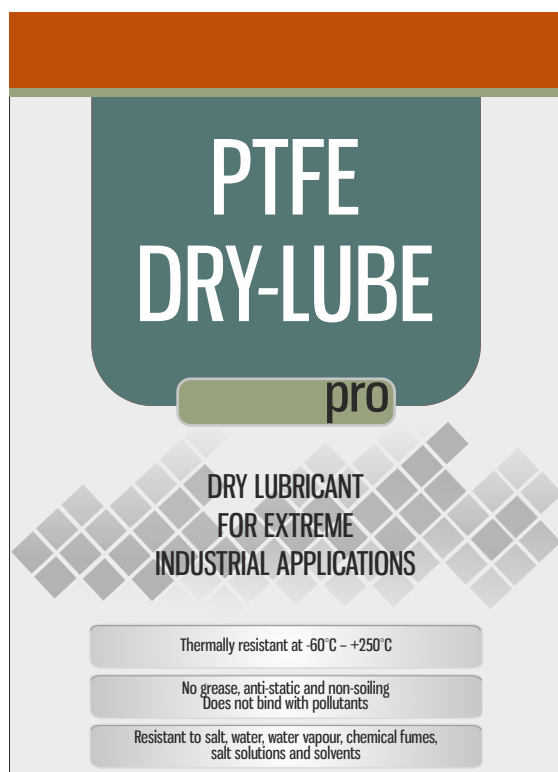

### GENERAL INFORMATION

**PRO PTFE DRY-LUBE** is a lubricant that does not attract dirt, for dry lubrication in locations requiring sliding, subject to dirt oil and grease pollution. **PRO PTFE DRY-LUBE** is resistant to water, bases and acids and temperatures in the range of -60°C – +250°C. In extreme conditions it is consistently adhesive. **PRO PTFE DRY-LUBE** is a versatile product that can be used in various industries.

### TECHNICAL DATA

Form at 20°C: powder

Colour: white

Odour: distinctive

Water solubility: insoluble

### USAGE

**PRO PTFE DRY LUBE** is especially effective in the lubrication of: armoured cords, drive chains and wheels and mating elements, sunroof guidings, car seat rails, door and window hinges, locks, slide doors, tilt window mechanisms, furniture hinges, ball bearings, electric switches and all elements working under light or moderate loads. Additionally, the perfect solution for varnish booths and as an agent preventing the adhesion of plastics. **PRO PTFE DRY-LUBE** acts effectively even if the lubricated elements are subjected to extended periods of standstill. It is safe for plastics and rubber.

### CLASSIFICATION

Article code	Name	Packaging	Type
PDL	PRO PTFE DRY-LUBE	aerosol 400 ml	lubricants

#### CAUTION

All information, including illustrations, are reliable. However, the users should evaluate the usability of each product for a given application. TTP Polska Sp. z o.o. does not guarantee the accuracy of all information and does not accept responsibility for how the products are used. The liabilities of TTP Polska Sp. z o.o. are limited solely to the standard terms and conditions of sale of the product and in no case whatsoever does TTP Polska Sp. z o.o. bear any responsibility for accidental or indirect damages resulting in the sale, use and improper use of the product.

TTP POLSKA - Top Technical Products Autonomic Group

[www.tppolska.pl](http://www.tppolska.pl)

